



REMOTE 1104 PARTICLE COUNTER

Using state-of-the-art laser technology, the Lighthouse **REMOTE 1104** is an industry first - a laser diode based remote particle counter with a sensitivity of 0.10 micron and a high flow rate of 1.0 CFM (28.3 LPM).

Designed with reliability and quality in mind, the **REMOTE 1104** features our long-life laser diode technology that provides higher concentration limits, a better signal to noise ratio and requires less routine maintenance than conventional HeNe laser-based particle counters.

The **REMOTE 1104** supplies continuous real time data at a cost-effective price per point. Very simple to integrate with large facility monitoring and management systems, the **REMOTE 1104** can transfer up to 8 channels of simultaneous particle count data via RS-485 MODBUS.

**Designed and built by
Lighthouse - a name you can trust.**

Lighthouse is an ISO 9001:2000 Registered Company.

www.golighthouse.com

Features:

- ★ 0.10 - 1.0 μ m Sensitivity
- ★ 1.0 CFM (28.3 LPM) Flow Rate
- ★ Up to 8 Channels of Simultaneous Data
- ★ World's Smallest 1.0 CFM 0.10 μ m counter
- ★ Meets ISO 21501-4 Standards
- ★ Long Life Laser Diode
- ★ Small Footprint
- ★ Status Indicators
- ★ RS-485 MODBUS
- ★ Stainless Steel Enclosure
- ★ Interfaces to Facility Monitoring Systems
- ★ Uses External Vacuum Source
- ★ Designed for Reliability
- ★ Designed to Ensure 21 CFR Part 11 Compliance when used with Additional Software
- ★ No Routine Laser Tube Replacements
- ★ No Routine Laser Optics Cleaning

Benefits:

- ★ 2 Year Warranty
- ★ Cost Effective Price per Point
- ★ Proven Data Integrity
- ★ Provides Continuous Real-Time Data
- ★ Reduced Maintenance costs over HeNe
- ★ Easy System Integration
- ★ International Support
- ★ Low Cost of Ownership



Specifications

	<i>REMOTE 1104</i>
Size Range:	0.10 - 1.0 μm
Channel Sizes:	Standard: 0.10, 0.15, 0.2, 0.25, 0.3, 0.5, 0.7, 1.0 μm
Communication Modes:	RS 485 MODBUS
Counting Efficiency:	50% @ 0.1 μm ; 100% for particles > 0.15 μm (per JIS)
Flow Rate:	1.0 CFM (28.3 LPM)
Light Source:	Laser Diode
Zero Count Level:	<1 count / 5 minutes (per JIS)
Concentration Limits:	500,000 Particles / ft ³ (17,150,000 / m ³) @ 5% Coincidence Loss, per ISO 21501-4
Calibration:	NIST Traceable, per ISO 21501-4
Vacuum Requirements:	External Vacuum required, nominal 1.0 CFM >18" (45.72 cm) of Hg
LED Indicators:	Power, Flow, Service, Sampling
Supporting Software:	Lighthouse Monitoring System, LMS Express, LMS Express RT, LMS Net
Enclosure:	Stainless Steel
Power:	24 VDC
Dimensions:	10.5" (w) x 7.65" (h) x 3.35" (d) [26.67 x 19.43 x 8.51 cm]
Weight:	7.0 lb (3.18 kg)

Environmental Conditions


Operating: 50°F to 104°F (10°C to 40°C) / 20% to 95% non-condensing
Storage: 14°F to 122°F (-10°C to 50°C) / Up to 98% non-condensing

Accessories

Included: Operating Manual on CD, Purge Filter, Power Supply, Power Cord
Optional: Isokinetic Sampling Probe, Sample Tubing, Cabling



LMS NET

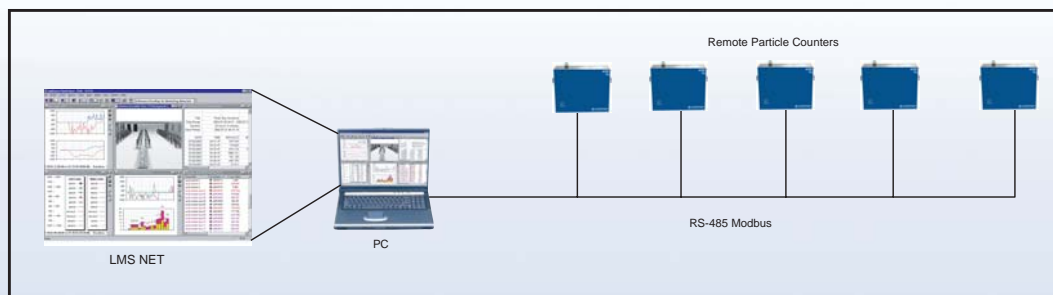

RS 485 MODBUS
SAMPLE SYSTEM INTEGRATION


Manufactured by:



www.golighthouse.com
info@golighthouse.com



Distributed by:

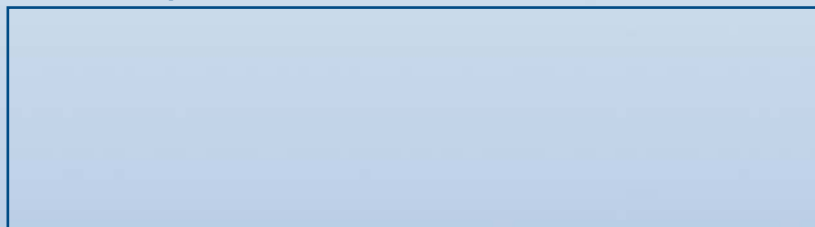

Tel: 800 945 5905
510 438 0500 (Outside of USA)

Lighthouse Worldwide Solutions reserves the right to change specifications without notice.

LWS PN 545401690-1 Rev 1